



# INFRATECH POLYMERS INC.

## Environmental Highway Products

UNIT #4 19747 TELEGRAPH TRAIL LANGLEY BC CANADA V1M 3E6  
 (604) 888-8808 1-800-567-4888 Fax (604) 888-8191

### PRODUCT DATA SHEET


# WIMBLE™ TENNIS COURT MIX

February, 1996.

### READ BEFORE USING THIS PRODUCT

#### GENERAL

Wimble™-mix is a high quality self draining tennis court mix. Wimble™-mix is designed for areas with high precipitation. The open graded texture of the mix allows tennis court to be used in minutes after a rain. The smooth surface allows for excellent playing conditions.

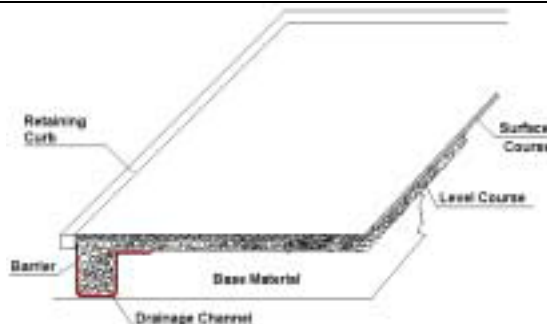

#### SPECIFICATION CONFORMANCE

The Wimble™-mix binder consists of a uniquely modified asphalt cement. The aggregate for Wimble™-mix should be a clean washed gravel with the following gradation:

<u>Sieve Size</u>	<u>Percent passing</u>
12.5 mm	100
9.5 mm	95-100
4.75 mm	20-30
2.36 mm	8-12
1.18 mm	5-9
0.600 mm	3-6
0.300 mm	2.5-3.5
0.150 mm	2-3
0.075 mm	0-2

The final job mix formula (JMF) will be determined by Infratech Polymers Inc. laboratory.

#### PROPERTIES

1. Free drainage feature maximizes court utilization
2. No tack coat required
3. Smooth durable surface that accepts tennis court paint
4. Excellent skid resistance
5. Extremely good adhesion of binder to aggregate
6. Easy to compact to 100%

#### INSTALLATION

Drainage channels should be prepared (saw cut) across the entire surface perpendicular to the fall line. Channels should be 300 mm wide with a depth to the base course. Channels should be protected with waterproofing barrier trench and filled with Wimble™-mix. Tack coat is not required for the level course. The surface should be simply swept, or pressure washed. The level course should be minimum 40 mm of uniformly compacted Wimble™-mix. The surface course overlay should be placed in a single lift producing a compacted mat thickness of 25 mm over the level course.

Installation of retaining curb around the tennis court is strongly recommended in order to prevent deterioration of edges. Either concrete curb, permanent wood (4"x4") or metal can be used.

#### WARRANTY

INFRATECH POLYMERS INC. warrants that Wimble™-mix meets applicable ASTM, Federal State or Provincial specifications at time of delivery.

#### TECHNICAL INFORMATION

Please contact our Product Research Department for detailed Technical Data and information about our full product range. ( 1-800-567-4888 )

No Other Warranty Of Any Kind Is Made By The Seller, Express Or Implied, Statutory, By Operation Or Law, Or Otherwise, Including Merchantability And Fitness For A Particular Purpose.

**DISTRIBUTED BY: CANADIAN CONSTRUCTION PRODUCTS 604-888-7171**